

SmartTube T5 LED-lysrör

Uppgradera till LED. Behåll dina befintliga armaturer och byt till SmartTube. Rören är mycket ljusstarka, passar för montering på höga höjder utan ljusförlust och ger optimal färgåtergivning för produktexponering i t ex handel.

Flimmerfria LED-lysrör
med upp till 100 000
timmars drifttid och
7 års garanti*



Marknadens mest ljusstarka LED-Lysrör med en effekt på upp till hela 180 lumen per watt.

Med ändkontakterna låsbara och roterbara (180°) vilket gör att ljuset kan riktas för optimalt ljusflöde även då det monteras i en fast armatur. Kan levereras i helt flimmerfritt

utförande och monteras i befintliga lysrörsarmaturer. Har en garanterad brinntid på 70 000 timmar och 5 års garanti. Ett lysrör som minskar energiförbrukningen samt ger dig ett underhållsfritt och hållbart ljus.

* Gäller 200 lm/W-serien

TopRight Nordic AB (publ)

We take a holistic approach to projects for innovative exposure experiences, smart buildings, flexible surfaces, advanced technical constructions, and energy-saving environments.

Stockholm

TopRight Nordic AB
Taptogatan 6
115 26 Stockholm
+46 (0) 8-530 300 50
toprightnordic.com

Göteborg

TopRight Nordic AB
Beatrice Lesslies Gata 7
421 31 Västra Frölunda
+46 (0)8-530 300 50
info@toprightnordic.com

SmartTube T5



SmartTube har ett elegant utseende för **G5 anslutning** med roter- och låsbara ändkontakter.


Material. 6063 aluminium för optimal kylning och ett polykarbonat cover som säkrar för en lång livslängd.

Optik. Professionell design med jämn ljusspridning utan skuggor.

Användning. Passar i de mesta miljöer – stormarknader, industrier, skolor, parkeringshus, sjukhus med flera.


MODELL FROSTAD & KLAR	
Anslutning	T5 / G5
Elnät	AC 100-240V 50/60Hz
Effektivitetsfaktor	0.95
Färgåtergivningindex	> Ra 80
Färgtemperaturer	3000K, 4000K, 5000K, 6000K
Flimmernivå	< 5%
Ljusets strålningsvinkel	140°
Genomsnittlig livslängd L ₇₀ 25°C	Upp till 100 000 timmar och 7 års garanti för 200 lm/W
Garanti	5 år
Användningstemperatur	- 20 °C - 48 °C
Luftfuktighet vid användning	< 95 %
Material	6063 Aluminium, PC-plast
Märkningar	CE, TUV, (EMC, LVD) RoHS

Dimensioner

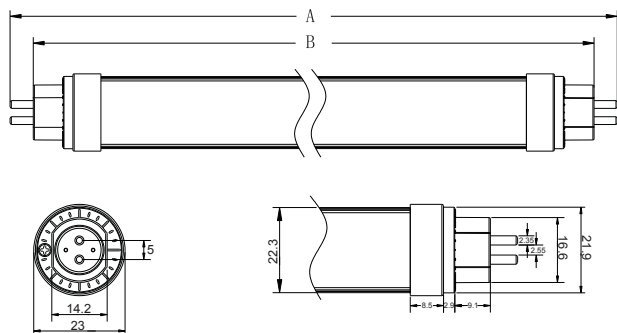

	2feet	3feet	4feet	5feet
Dimension	548	848	1148	1448
A:	562mm	862mm	1162mm	1462mm
B:	548mm	848mm	1148mm	1448mm

Spridningsvinkel

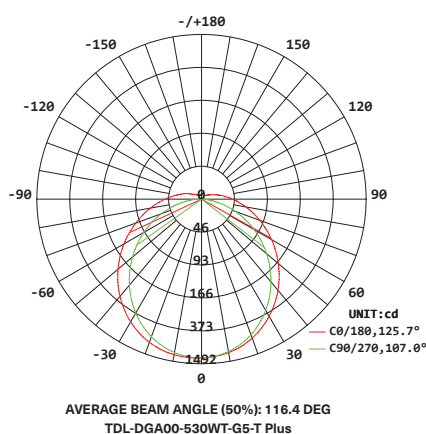

TopRight Nordic AB (publ)

We take a holistic approach to projects for innovative exposure experiences, smart buildings, flexible surfaces, advanced technical constructions, and energy-saving environments.

Stockholm

TopRight Nordic AB
 Taptogatan 6
 115 26 Stockholm
 +46 (0) 8-530 300 50
 toprightnordic.com

Göteborg

TopRight Nordic AB
 Beatrice Lesslies Gata 7
 421 31 Västra Frölunda
 +46 (0)8-530 300 50
 info@toprightnordic.com

SmartTube T5.

130/140 lumen/W

Lumen effekt 130/140 lm/W

LED-typ 2835 LED, Epistar

Ingångsspänning AC100-240 V

CCT 3000 K 4000 K 5000 K 6000 K

CRI >80

PF >0.95

Ljusspridning 140°

Driver Inbyggd

Arbetstemperatur -20° C – 48° C



MODELL FROSTAD 130lm/W	TDL-DGA00-209WT-G5-H	TDL-DGA00-312WT-G5-H	TDL-DGA00-418WT-G5-H	TDL-DGA00-420WT-G5-H	TDL-DGA00-525WT-G5-H	TDL-DGA00-530WT-G5-H	TDL-DGA00-535WT-G5-H
Längd (Millimeter)	549mm	849mm	1149mm	1149mm	1449mm	1449mm	1449mm
Effekt	9 W	12 W	18 W	20 W	25 W	30 W	35 W
Energiklass	A++	A++	A++	A++	A++	A++	A++
Ljusflöde	1170lm	1560lm	2340lm	2600lm	3250lm	3900lm	4550lm

MODELL KLAR 140lm/W	TDL-DGA00-209WT-G5-H	TDL-DGA00-312WT-G5-H	TDL-DGA00-418WT-G5-H	TDL-DGA00-420WT-G5-H	TDL-DGA00-525WT-G5-H	TDL-DGA00-530WT-G5-H	TDL-DGA00-535WT-G5-H
Längd (Millimeter)	549mm	849mm	1149mm	1149mm	1449mm	1449mm	1449mm
Effekt	9 W	12 W	18 W	20 W	25 W	30 W	35 W
Energiklass	A++	A++	A++	A++	A++	A++	A++
Ljusflöde	1260lm	1680lm	2520lm	2800lm	3500lm	4200lm	4900lm

TopRight Nordic AB (publ)

We take a holistic approach to projects for innovative exposure experiences, smart buildings, flexible surfaces, advanced technical constructions, and energy-saving environments.

Stockholm

TopRight Nordic AB
Taptogatan 6
115 26 Stockholm
+46 (0) 8-530 300 50
toprightnordic.com

Göteborg

TopRight Nordic AB
Beatrice Lesslies Gata 7
421 31 Västra Frölunda
+46 (0)8-530 300 50
info@toprightnordic.com

SmartTube T5.

160/170 lumen/W

Lumen effekt 160/170 lm/W

LED-typ 2835 LED, Epistar

Ingångsspänning AC100-240 V

CCT 3000 K 4000 K 5000 K 6000 K

CRI >80

PF >0.95

Ljusspridning 140°

Driver Inbyggd

Arbetstemperatur -20° C – 48° C



MODELL FROSTAD 160lm/W	TDL-DGA00-206WT-G5-T	TDL-DGA00-209WT-G5-T	TDL-DGA00-312WT-G5-T	TDL-DGA00-412WT-G5-T	TDL-DGA00-418WT-G5-T	TDL-DGA00-420WT-G5-T	TDL-DGA00-425WT-G5-T	TDL-DGA00-525WT-G5-T	TDL-DGA00-530WT-G5-T	TDL-DGA00-535WT-G5-T
Längd (Millimeter)	549mm	549mm	849mm	1149mm	1149mm	1149mm	1149mm	1449mm	1449mm	1449mm
Effekt	6 W	9 W	12 W	12 W	18 W	20 W	25 W	25 W	30 W	35 W
Energiklass	A++	A++	A++	A++	A++	A++	A++	A++	A++	A++
Ljusflöde	960lm	1440lm	1920lm	1920lm	2880lm	3200lm	4000lm	4000lm	4800lm	5600lm

MODELL KLAR 170lm/W	TDL-DGA00-206WT-G5-T	TDL-DGA00-209WT-G5-T	TDL-DGA00-312WT-G5-T	TDL-DGA00-412WT-G5-T	TDL-DGA00-418WT-G5-T	TDL-DGA00-420WT-G5-T	TDL-DGA00-425WT-G5-T	TDL-DGA00-525WT-G5-T	TDL-DGA00-530WT-G5-T	TDL-DGA00-535WT-G5-T
Längd (Millimeter)	549mm	549mm	849mm	1149mm	1149mm	1149mm	1149mm	1449mm	1449mm	1449mm
Effekt	6 W	9 W	12 W	12 W	18 W	20 W	25 W	25 W	30 W	35 W
Energiklass	A++	A++	A++	A++	A++	A++	A++	A++	A++	A++
Ljusflöde	1020lm	1530lm	2040lm	2040lm	3060lm	3400lm	4250lm	4250lm	5100lm	5950lm

TopRight Nordic AB (publ)

We take a holistic approach to projects for innovative exposure experiences, smart buildings, flexible surfaces, advanced technical constructions, and energy-saving environments.

Stockholm

TopRight Nordic AB
Taptogatan 6
115 26 Stockholm
+46 (0) 8-530 300 50
toprightnordic.com

Göteborg

TopRight Nordic AB
Beatrice Lesslies Gata 7
421 31 Västra Frölunda
+46 (0)8-530 300 50
info@toprightnordic.com

SmartTube T5.

175/180 lumen/W

Lumen effekt 175/180 lm/W

LED-typ 2835 LED, Epistar

Ingångsspänning AC100-240 V

CCT 3000 K 4000 K 5000 K 6000 K

CRI >80

PF >0.95

Ljusspridning 140°

Driver Inbyggd

Arbetstemperatur -20° C – 48° C



SmartTube T5 175lm/W	TDL-DGA00-209WT-G5-TS	TDL-DGA00-312WT-G5-TS	TDL-DGA00-418WT-G5-TS	TDL-DGA00-520WT-G5-TS	TDL-DGA00-525WT-G5-TS	TDL-DGA00-530WT-G5-TS	TDL-DGA00-533WT-G5-TS
Längd	549mm	849mm	1149mm	1449mm	1449mm	1449mm	1449mm
Effekt	9W	12W	18W	20W	25W	30W	35W
Energiklass	A++	A++	A++	A++	A++	A++	A++
Ljusflöde	1575lm	2100lm	3150lm	3500lm	4375lm	5250lm	6125lm

* 180 lumen med klar cover, ljusspridning 120°

TopRight Nordic AB (publ)

We take a holistic approach to projects for innovative exposure experiences, smart buildings, flexible surfaces, advanced technical constructions, and energy-saving environments.

Stockholm

TopRight Nordic AB
Taptogatan 6
115 26 Stockholm
+46 (0) 8-530 300 50
toprightnordic.com

Göteborg

TopRight Nordic AB
Beatrice Lesslies Gata 7
421 31 Västra Frölunda
+46 (0)8-530 300 50
info@toprightnordic.com

SmartTube T5.

200 lumen/W

Lumen effekt 200 lm/W

LED-typ 2835 LED

Ingångsspänning AC100-240 V

CCT 3000 K 4000 K 5000 K 6000 K

CRI >80

PF >0.95

Ljusspridning 140°

Driver Inbyggd

Arbetstemperatur -20° C – 48° C



SmartTube T5 200lm/W	TDL-DGA00-206/9WT-G5-S	TDL-DGA00-309/12WT-G5-S	TDL-DGA00-410/15WT-G5-S	TDL-DGA00-412/18WT-G5-S	TDL-DGA00-516/24WT-G5-S	TDL-DGA00-520/24WT-G5-S
Längd	60cm	90cm	120cm	120cm	150cm	150cm
Effekt	6/9W	9/12W	10/15W	12/18W	16/24W	20/24W
Energiklass	A++	A++	A++	A++	A++	A++
Ljusflöde	1200/1800lm	1800/2400lm	2000/3000lm	2400/3600lm	3200/4800lm	4000/4800lm

TopRight Nordic AB (publ)

We take a holistic approach to projects for innovative exposure experiences, smart buildings, flexible surfaces, advanced technical constructions, and energy-saving environments.

Stockholm

TopRight Nordic AB
Taptogatan 6
115 26 Stockholm
+46 (0) 8-530 300 50
toprightnordic.com

Göteborg

TopRight Nordic AB
Beatrice Lesslies Gata 7
421 31 Västra Frölunda
+46 (0)8-530 300 50
info@toprightnordic.com